



Colors: Charcoal Gray/Old Town Gray/Tahoe Blue  
Architect: Environmental Works  
Installer: Tecta America

## NRM-8000 PANELS • Flush Panel

**NRM-8000** flush mount panels are designed for wall, fascia and soffit applications where a flush or flat appearance is desired. A rounded interlock leg, concealed fastening system improves the flush appearance while providing additional strength. Panels are factory formed to length to minimize field cutting (12.00" – 45.00'). NRM-8000 panels are available in 14 different profiles from standard 12" wide smooth to specific reveals and striations.

NRM-8000 panels are intended for use in vertical and horizontal wall, fascia and soffit applications. It is not intended for use in roofing or mansard applications.

Stiffening beads (ribs) & striations: NRM-8000 panels are available with 1, 2, or 3 pencil ribs or striations. These cosmetic enhancements are recommended for longer panel lengths.



### TRIM

All flashing and trim shall be fabricated by Nu-Ray Metals or a qualified fabricator. Flashing for this panel shall be steel (18, 20, 22, 24, or 26 gauge), or aluminum (.050, .040, or .032).

### INSTALLATION

NRM-8000 panels shall be installed over a solid deck or wall with appropriate 30# felt or ice and water shield, or, in limited applications, over framing sections. When used in a windscreen application, panels must be fastened through side joints.

### HANDLING



Vinyl masking is provided on all steel sheet to help protect materials where extra handling is expected.

### WARRANTY

A 40-year non-prorated finish warranty can be supplied covering finish performance.



# NRM-8000 Flush Concealed Fastener Panel

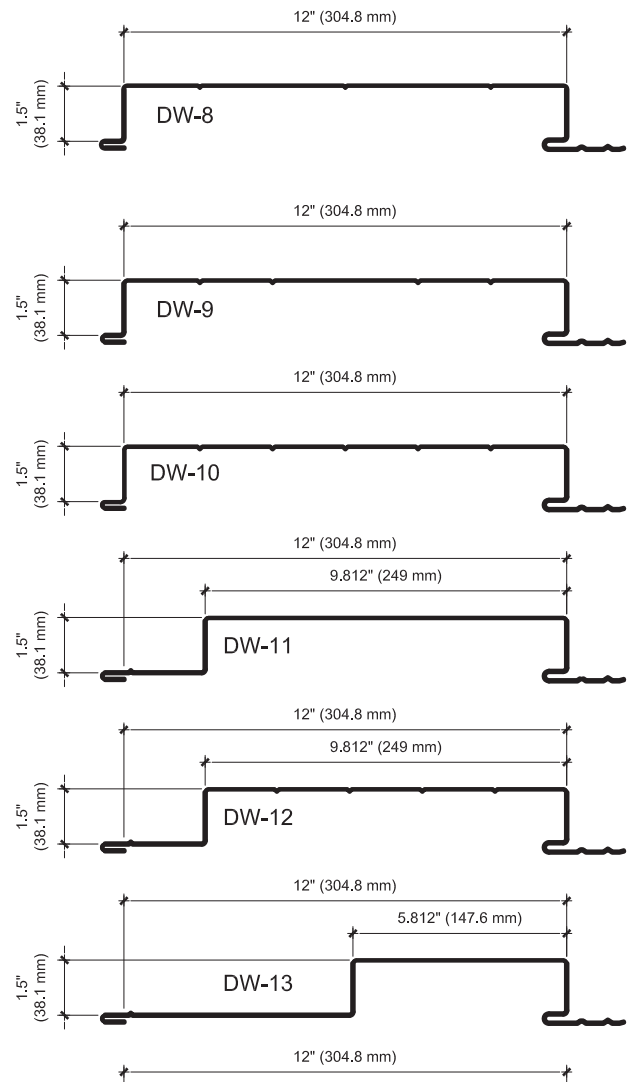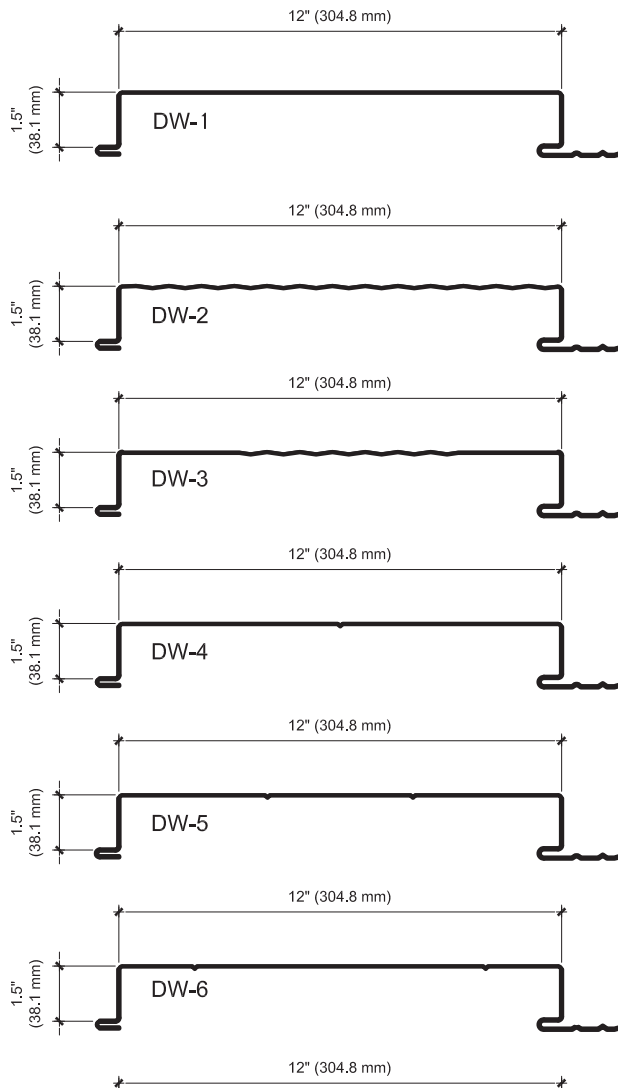

## NRM-8000 FEATURES

- No exposed fasteners for a clean, continuous application
- Architectural structural panel designed for vertical or horizontal applications on walls, fascia and soffits
- Easy to install tongue-and-groove engagement system
- Optional single or double venting and full perforation
- 14 different profiles to meet your design criteria
- 2" and 6" reveals available

**PANEL DEPTH : 1 3/4"**

**PANEL COVER WIDTH : 12"**

**PANEL LENGTHS: 5' 0" to 44' 0" standard**

TEFLON® is a registered trademark of The Chemours Company FC, LLS used under sublicense by Nu-Ray Metal Products, Inc.

## METAL OPTIONS

- 18, 20, 22 (special order), 24 and 26 gauge G90 or AZ50 steel
- .032, .040 and .050 aluminum (special order)
- 16 oz. or 20 oz. natural copper (special order)
- 20, 22, 24 and 26 gauge stainless steel

## SURFACE OPTIONS

- Smooth
- 1 line (single) vent strip
- 2 line (double) vent strip
- Perforated

## FINISHES

- D2 Kynar 500® ULTRA-Cool™
- D2 Kynar 500® with Ocean Guard ULTRA-Cool™
- Zinalume Plus\*
- Standard Kynar 500® ULTRA-Cool™

Kynar® and Kynar 500® are registered trademarks of Arkema Inc. used under sublicense by Nu-Ray Metal Products, Inc.



**(800) 700-7228**

**www.NuRayMetals.com**

Questions? Contact our Technical Department at  
info@nuraymetals.com