



**Color: Moss Green**  
**Installer: Dowling Brothers Roofing**

## **NRM-9000 PANELS • Corrugated**

**NRM-9000** panels are ideal for walls, mansards, roofs, fences and equipment screens. The 9000 panel can be specified in a wide variety of materials to fit any design need. This product is factory roll-formed in maximum length of 45' 0" and minimum length of 4' 0".

NRM-9000 features a  $\frac{7}{8}$ " tall rib height with a net roof coverage of 28" and a net wall coverage of 32".

### **FASTENERS**

For roofing applications, use wood-type screws fastened on 24" centers. Other screw types are available applications over structural steel and steel decking.

### **TRIM**

All flashing and trim shall be fabricated by Nu-Ray Metals or a qualified fabricator. Flashings for this panel shall be 26, 24 or 22 gauge steel.

### **INSTALLATION**

For roofing applications, NRM-9000 panels shall be installed over solid decking ( $\frac{5}{8}$ " plywood, nailboard insulation or equivalent) with an underlayment of 30# roofing felt applied horizontally from eave to ridge. Panels shall be fastened on 24" centers for standard 26 gauge application. Minimum roof pitch is 3:12.

### **HANDLING**

Vinyl masking is provided on all steel sheet to help protect materials where extra handling is expected.

### **WARRANTY**

A 40-year non-prorated finish warranty can be supplied covering finish performance.



Nu-Ray Metal Products, Inc. 1234 37th Street NW Auburn, WA 98001  
Tel. (800) 700-7228 Fax (253) 833-7268 Web [NuRayMetals.com](http://NuRayMetals.com)

# NRM-9000 Corrugated Panel



## NRM-9000 FEATURES

- Superb panel for architectural, commercial and industrial roof, wall, soffit and mansard applications
- Factory-injected seam sealant available as an option
- Great load and span capacities
- Apply over solid substrates or open framing
- On site forming available
- Minimum 3:12 roof pitch

**PANEL DEPTH :** 7/8"

**PANEL WIDTHS :** 32" wall and 28" roof

**PANEL LENGTHS:** 5' 0" to 44' 0" standard

## METAL OPTIONS

- 24 and 26 gauge G90 or AZ50 steel
- .032 and .040 aluminum (special order)
- 16 oz. or 20 oz. natural copper (special order)

## SURFACE OPTIONS

- Standard
- Perforated (extended lead time applies)
- Embossed (extended lead time applies)


## FINISHES

- D2 Kynar 500® ULTRA-Cool™
- D2 Kynar 500® with Ocean Guard ULTRA-Cool™
- Zincalume Plus\*
- Vintage

Kynar® and Kynar 500® are registered trademarks of Arkema Inc. used under sublicense by Nu-Ray Metal Products, Inc.


STITCH FASTENER (@ 1'-8" O.C.) NOTE: PRE-DRILL EXTERIOR SIDE OF SHEET FOR STITCH FASTENER BEFORE ERECTION

## FASTENER LOCATIONS - WALL:

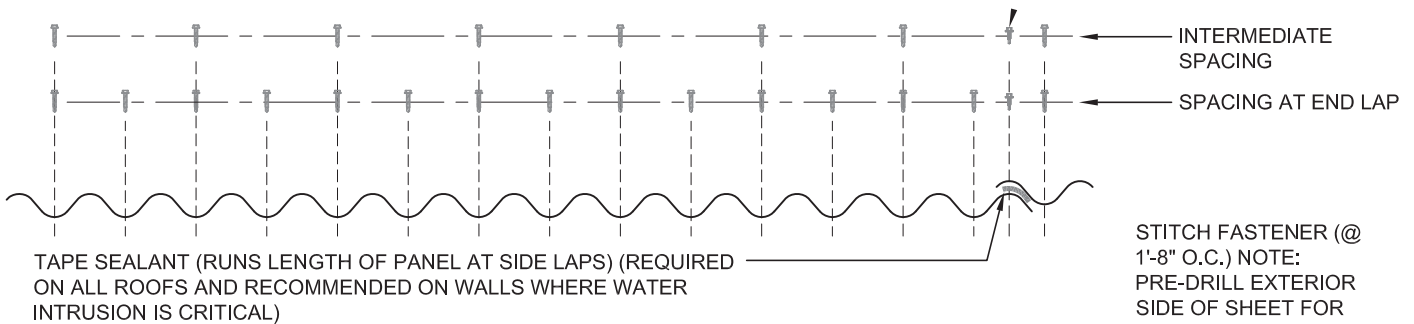

STITCH FASTENER (@ 1'-8" O.C.) NOTE: PRE-DRILL EXTERIOR SIDE OF SHEET FOR STITCH FASTENER BEFORE ERECTION

## FASTENER LOCATIONS - ROOF:

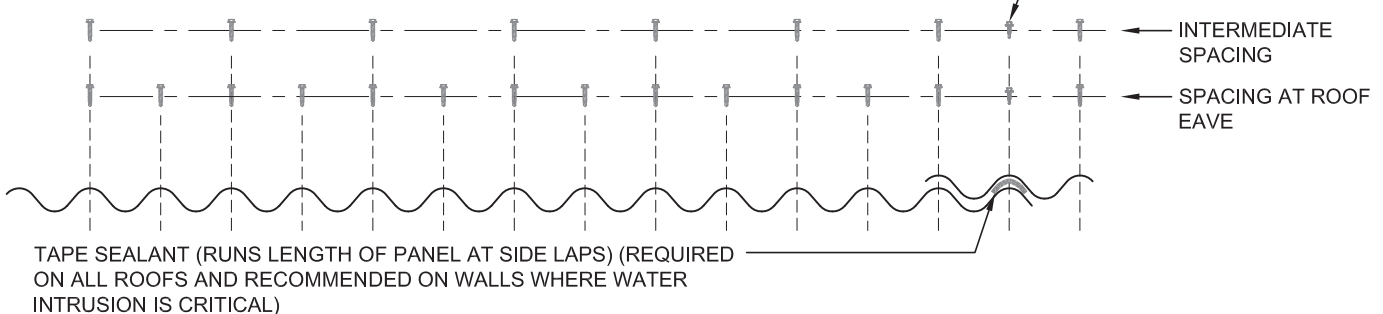

(800) 700-7228

[www.NuRayMetals.com](http://www.NuRayMetals.com)

Questions? Contact our Technical Department at  
[info@nuraymetals.com](mailto:info@nuraymetals.com)